




# ROLA-TRAC™ ULTRA

TEMPORARY PEDESTRIAN AND EVENT FLOORING


**Rola-Trac™ ULTRA** is a click together system of panels, which can be fitted on any surface and to any shape, creating a firm, non slip surface for commercial, professional and domestic use.

The flexibility and variety of uses make it one of the most adaptable flooring systems available. It can be used for both indoor and outdoor events where a solid non-skid surface is required and the existing surface must be protected. Grass is protected from being trampled and dirt areas are covered.

**Rola-Trac™ ULTRA** is very fast and easy to install, as no tools or expertise are required and panels are supplied in pre-assembled panels. **Rola-Trac™ ULTRA** can be used in all weather conditions as it is moulded with high-impact polypropylene with UV inhibitors preventing damage from long UV exposure.

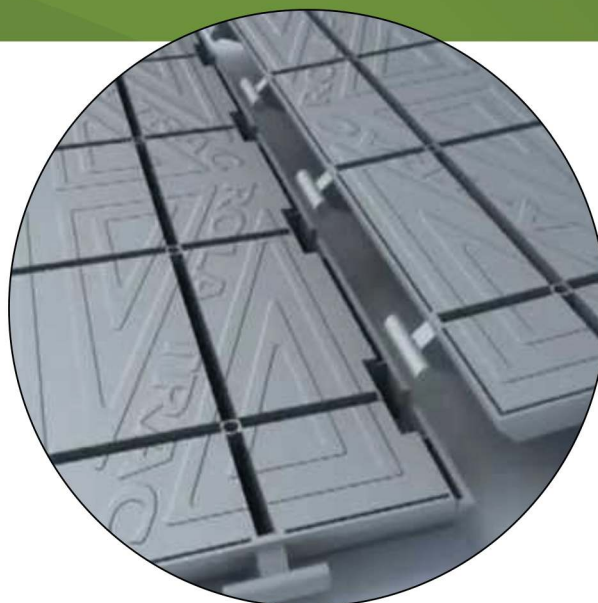

 **MADE IN  
BRITAIN**

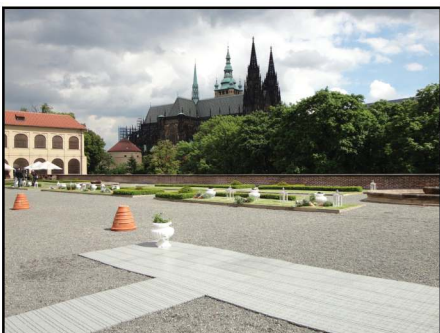

Data Sheets, Installation & Design Guidances  
and Case Studies can be downloaded from [www.groundtrax.com/downloads](http://www.groundtrax.com/downloads)



# ROLA-TRAC™ ULTRA

TEMPORARY PEDESTRIAN AND EVENT FLOORING



## Suitable for:

- ✓ Pedestrian Walkway
- ✓ Event and Marquee Flooring
- ✓ Exhibition/Static Display Use
- ✓ Self Installation

## Benefits:

- ✓ Pedestrian-friendly surface
- ✓ Hi-Vis ramps
- ✓ Extremely light and portable
- ✓ Quick and easy to install

### TECHNICAL SPECIFICATIONS

#### Dimensions & Materials

Panel Dimensions:	330 mm x 165 mm x 18mm
Panel Weight:	197g (3.65 kg/m <sup>2</sup> )
Material:	PPCP
Colour:	Grey/Black/Green (Other colours available to order)
Edging Ramps:	Black/Yellow

#### Operating Conditions

Temperature:	-40c > +40c
Static Load:	37 Tons/m <sup>2</sup>

#### Resistance to sunlight and ultra violet light exposure

The product will not be detrimentally affected with regard to strength and structure for a minimum of 5 years, however over exposure could lead to slight fading of colour.

#### Resistance to petrol and oil derivatives

PP is impervious to the exposure of most substances and the only effect of such contact could be slight discolouration.

#### Resistance to corrosion

We are not aware of any substance that would lead to the product corroding.

#### External storage

The product is suitable for outside, uncovered storage - the only impact being the possibility of slight fading of colour.

#### Lateral inclines of 20%

The product is able to support slopes and inclines. Should it be felt the situation dictates, pegs can be used to secure the product.

#### Permeable to liquid

The product is not permeable to liquid. The panels have been designed to ensure liquid drains from the panel surface using the designed holes.

#### Usability in muddy conditions

The product can be used in muddy conditions. By using geotech substrate the product can successfully be deployed, adding value by improving traction and protecting the underlying surface from further deterioration. Should the surface of the panels become too muddy through traffic movement, this can be easily removed by either pressure washing or sweeping with a hard brush.



For more information, contact us  
today or visit our website:

[www.groundtrax.com](http://www.groundtrax.com)

## GROUNDTRAX

Ground Protection and Reinforcement

Telephone: 03456 800008 | Fax: 03456 800208

E-Mail: [info@groundtrax.com](mailto:info@groundtrax.com) | Website: [www.groundtrax.com](http://www.groundtrax.com)