



SUPA-TRAC™ LITE



TEMPORARY EVENT SURFACE

Supa-Trac™ Lite is the ultimate lightweight pedestrian flooring. It conforms to almost all ground types and conditions, and can be laid over whatever area or shape you need.

With super quick installation and extraction – up to 70m² per man hour – it's the simplest, fastest ground cover solution of its type on the market. No clips, tools or expertise needed.

Super tough, **Supa-Trac™ Lite** is suitable for temporary flooring for exhibitions, access routes and pathways. Edging ramps are available to eliminate trip hazards. Store it inside or out for years of flexible use; whenever, wherever. It comes in a range of colours and, as with all Rola-Trac™ products, meets anti-slip regulations.

With a panel weight of just 4.7kg per m² capable of supporting a static load of up to 54,000kg per m², **Supa-Trac™ Lite** matches the toughest of jobs at an incredibly appealing price.

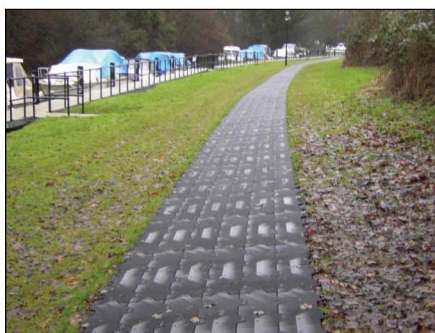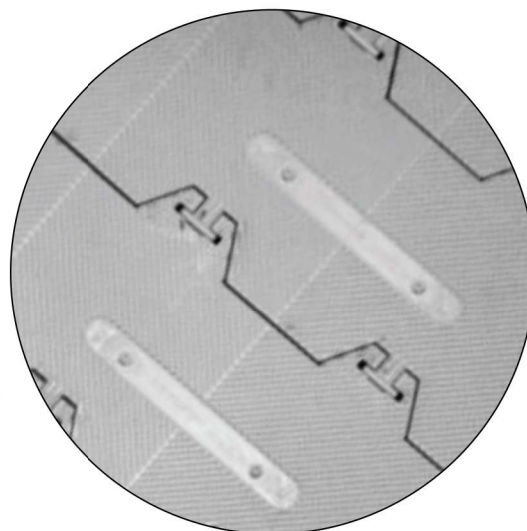

Data Sheets, Installation & Design Guidances
and Case Studies can be downloaded from www.groundtrax.com/downloads

SUPA-TRAC™ LITE

TEMPORARY TRAFFICABLE EVENT SURFACE



Suitable for:

- ✓ Exhibitions
- ✓ Pedestrian Walkways
- ✓ Pitch Coverings
- ✓ Self Installation

Benefits:

- ✓ Pedestrian-friendly surface
- ✓ Lightweight, portable and durable
- ✓ Hi-Vis ramps
- ✓ Quick and easy to install

TECHNICAL SPECIFICATIONS

Dimensions & Materials

Panel Dimesions:	966mm x 275mm x 27mm
Panel Weight:	0.99kg (4.71kg/m ²)
Material:	Standard Grade PPCP
Colour:	Black/Grey/Green (Other colours available to order)
Edging Ramps:	Black/Yellow

Operating Conditions

Temperature:	-49c > +49c
Static Load:	54 Tons/m ²

Resistance to sunlight and ultra violet light exposure

The product will not be detrimentally affected with regard to strength and structure for a minimum of 5 years, however over exposure could lead to slight fading of colour.

Resistance to petrol and oil derivatives

PP is impervious to the exposure of most substances and the only effect of such contact could be slight discolouration.

Resistance to corrosion

We are not aware of any substance that would lead to the product corroding.

External storage

The product is suitable for outside, uncovered storage - the only impact being the possibility of slight fading of colour.

Lateral inclines of 20%

The product is able to support slopes and inclines. Should it be felt the situation dictates, stakes can be used to secure the flooring.

Permeable to liquid

The product is not permeable to liquid. The panels have been designed to ensure liquid drains from the panel surface using the designed holes.

Usability in muddy conditions

The product can be used in muddy conditions. By using geotech substrate the product can successfully be deployed, adding value by improving traction and protecting the underlying surface from further deterioration. Should the surface of the flooring become too muddy through traffic movement, this can be easily removed by either pressure washing or sweeping with a hard brush.



For more information, contact us
today or visit our website:

www.groundtrax.com

GROUNDTRAX
Ground Protection and Reinforcement
Telephone: 03456 800008 | Fax: 03456 800208
E-Mail: info@groundtrax.com | Website: www.groundtrax.com