

BODPAVE™ 40

PRODUCT DETAILS

OVERVIEW

Patented interlocking cellular porous plastic paving grid system manufactured in the UK from 100% UV stabilised recycled and recyclable polymers. New and improved design based upon Bodpave 85.



APPLICATIONS

With decades of experience and hundreds of successful project installations, Terram Bodpave is the original interlocking cellular porous plastic paving grid system for ground reinforcement which can be installed with either a grass or gravel filled surface.



Typical uses include:

- Car and light vehicle parks
- Overspill / overflow grass car parks
- Walkways, disabled access routes & golf buggy paths
- Driveways and residential lawn parking
- Sustainable Urban Drainage Solution (SUDS) – source control



For more information, contact us
today or visit our website:

www.groundtrax.com


GROUNDTRAX
Ground Protection and Reinforcement

Telephone: 03456 800008 | Fax: 03456 800208

E-Mail: info@groundtrax.com | Website: www.groundtrax.com

FEATURES & BENEFITS

- Load bearing capacity up to 250t/SQM - suitable for cars and vans
- 24 ground spikes per paver provides excellent shear connection and allows slopes up to 1:8 / 12% / 7° and no additional pinning
- Overlapping loop and snap fit connections give excellent 100% lateral transfer of dynamic traffic loads with 250% improvement on previous BP40 design
- Supplied as 4 pre-connected pavers (1m x 1m) - allows rapid install on 95% open surface structure - SUDS source control compliant
- Grass or gravel finish free-draining and naturally pleasing appearance
- HDPE expansion/contraction tolerant therefore suitable for hot and cold climates
- Manufactured from 100% recycled and recyclable polymers – highly sustainable, non-toxic and chemically inert
- British manufactured with a low transport carbon footprint for UK deliveries

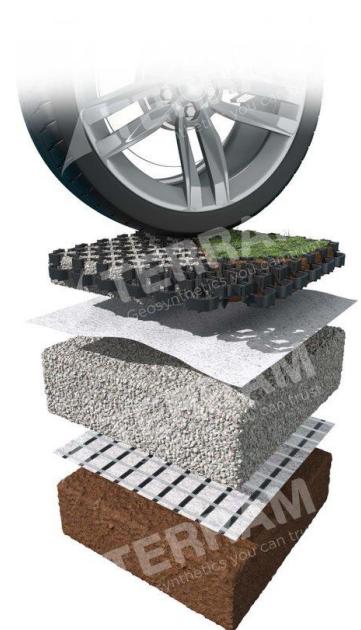

For more information, contact us
today or visit our website:

www.groundtrax.com

GROUNDTRAX
Ground Protection and Reinforcement

Telephone: 03456 800008 | Fax: 03456 800208
E-Mail: info@groundtrax.com | Website: www.groundtrax.com

SPECIFICATION

UNIT PROPERTIES

Material	100% recycled and recyclable polymers
Colour	Black or Green*
Dimensions	500mm x 500mm x 40mm + 20mm ground spike
Coverage	4 units/SQM
Internal Cell Size	67mm (cruciform) & 46mm (round)
Structure	Rigid walled, cellular
Cell Wall Thickness	2.5mm – 5.0 mm
Weight	1.125 kg/paver - (4.5kg/SQM)
Compressive Strength	< 250 tonnes/SQM
Basal Support & Anti-shear	Integral 20mm long Cross & T section ground spikes (24 per paver)
Permeability/Open Cell	Top 95% / Base 65%
Connection	Overlapping edge loop & cell connection with integral, self-locking, snap-fit clips

PACK PROPERTIES

Dimensions	1.2m x 1.0m x 2.4m
Gross Weight	285kgs
Units per Pack	240 (60m ²)



For more information, contact us
today or visit our website:

www.groundtrax.com

GROUNDTRAX
Ground Protection and Reinforcement

Telephone: 03456 800008 | Fax: 03456 800208
E-Mail: info@groundtrax.com | Website: www.groundtrax.com

DURABILITY PROPERTIES

Chemical Resistance	Excellent
UV Resistance	High
Units per Pack	240 (60m ²)
Anticipated Design Life	10 years*

Packaging & Identification Terram Bodpave units are supplied on pallets and shrink wrapped for stability.

Storage Can be stored externally but do not stack.

Quality Terram Bodpave units are supplied having met internal quality requirements in accordance with our Quality Management system which is certified to BS EN ISO 9001:2015.

Notes (*) When using recycled polymers it is difficult to maintain colour consistency between individual units and batches. Virgin polymer may also be used when recycled green polymer is in short supply.

Compression testing undertaken when units are filled with aggregate.

Connection/joint testing of unfilled units.

Long term durability will also depend upon maintenance, pavement construction and the intensity & frequency of traffic loading.

Additional Information Markers are available that can be used to delineate parking bays.



For more information, contact us
today or visit our website:

www.groundtrax.com

GROUNDTRAX
Ground Protection and Reinforcement

Telephone: 03456 800008 | Fax: 03456 800208

E-Mail: info@groundtrax.com | Website: www.groundtrax.com